


硅胶包覆波纹特氟龙软管

AX-006

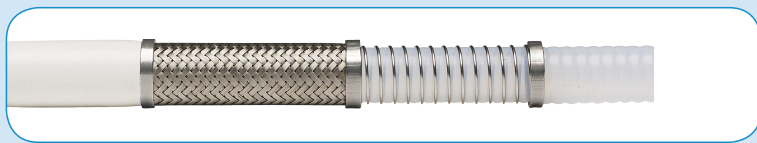

技术参数:

- 口径: 1/2" 到 2", 符合 DIN26054-1
- 标准与防静电内衬可供选择, 通过 ATEX 认证
- 里层为浅度波纹状 PTFE 软管, 内置不锈钢螺旋钢丝加强, 外覆 SS304 不锈钢编织, 并以硅胶包覆
- 柔韧性高, 抗扭结, 即使在高温时都有极好的耐高压和耐真空性能
- 特别适用于粘性介质的输送及对清洁要求很高的场合
- 工作温度: -70°C 至 +200°C

适用标准及认证:

- FDA, USP

Technical Description:

- Range 1/2"-2" (DN12-DN50) hose in accordance to DIN 26054-1
- Virgin and anti-static liners available, ATEX Certified
- A low profile (shallow), heavy walled, convoluted PTFE hose, with external stainless steel vacuum spiral and 304 stainless steel over braid as standard
- Excellent vacuum and pressure ratings, even at elevated temperatures
- Choose when hygienic cleaning, transfer of heavy viscous products/liquids and adhesive are areas of particular concern
- Temperature range: -70°C to +200°C

Standard/Approval:

- FDA, USP

产品编码 No.	Size in.	内径 mm	外径 mm	内衬壁厚 mm	工作压力 bar	爆破压力 bar	重量 kg/m
AX-006-0500	1/2"	11.5	22.8	1.25	50	250	0.40
AX-006-0630	5/8"	15.5	27.5	1.25	50	250	0.64
AX-006-0750	3/4"	18.5	30.6	1.50	60	290	0.90
AX-006-1000	1"	22.8	34.7	1.50	40	210	1.00
AX-006-1250	1-1/4"	30.5	43.8	1.50	45	210	1.50
AX-006-1500	1-1/2"	36.5	50.1	1.50	40	175	1.75
AX-006-2000	2"	48.5	62.2	1.65	25	135	2.65

防静电软管可供选择, 可提供翻边特氟龙管总成, 长度可定制

